



# MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLER

## MDG120H



### KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguisher automatically senses dryer fires, douses them with water and shuts off when the fire is out to minimize water damage. It's a breakthrough in commercial laundry safety that can even reduce your insurance costs!



### MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

### FOR YOUR OPERATION:

- 120-Pound Capacity Dries More At Once
- Auto Cycle Prevents Overdrying
- Programmable Anti-Wrinkle Feature
- Display Counts Down Time Remaining In Cycle
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Optional Reverse Tumbler Feature Reduces Twisting
- Removable Top Section For Easier Installation

### BUILT-TO-LAST™ FEATURES:

- SAFE System Puts Out Dryer Fires
- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor




**"SAFE" SYSTEM  
PROTECTS  
AGAINST DRYER FIRES.**

LAUNDRY SOLUTIONS YOU CAN *DEPEND* ON.

CLP678

## On-Premises Drying Tumbler — MICROPROCESSOR CONTROL

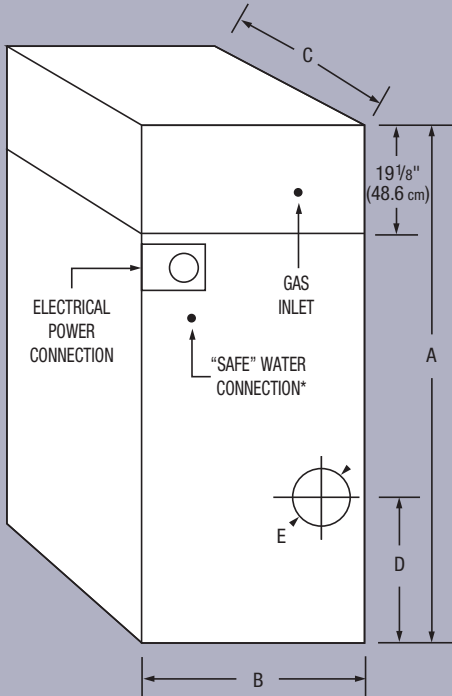

\*SAFE water pressure requires 40 psi ± 20 psi.  
Requires 1/2" (1.3 cm) water hose connection.

### MAYTAG® LIMITED WARRANTY 2 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



#### Multi-Load Dryer

#### DRYER SPECIFICATIONS

MODEL	MDG120H
<b>TUMBLER</b>	
Capacity — lbs. (kg)	120 (54.4)
Capacity — cu. ft. (cu. m)	38.3 (108)
Diameter — in. (cm)	44 1/2 (113)
Depth — in. (cm)	42 1/2 (107.9)
<b>REVERSING TUMBLER</b> (optional)	•
<b>DRIVE MOTOR</b>	
HP (kw)	3 (2.24)
<b>AIRFLOW</b>	
Cfm (cmm)	2,150 (60.9)
<b>HEAT INPUT</b>	
BTU/hr. (kcal/hr.)	375,000 (94,500)
<b>GAS INLET</b>	
In. (cm)	1 (2.54)
<b>VOLTAGE/BREAKER SIZE</b> — amps	
230V – 240V/3 PH (3-wire + ground)	25
<b>COLOR</b>	
White	•
<b>APPROXIMATE WEIGHT</b>	
Crated — lbs. (kg)	1,585 (719)
Uncrated — lbs. (kg)	1,349 (612)
<b>DIMENSIONS</b>	
A) Height — in. (cm)	86 7/8 (220.7)
B) Width — in. (cm)	48 3/8 (122.9)
C) Depth including door handle — in. (cm)	62 1/2 (158.8)
D) Floor to center of exhaust — in. (cm)	9 1/2 (24.1)
E) Exhaust diameter — in. (cm)	14 (35.6)
Door opening — in. (cm)	31 3/8 (79.7)

See specific instructions for proper installation.  
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



NEW YORK CITY  
M.E.A.



For more information and pricing, contact:

## Equipment Marketers

100 Melrose Avenue  
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net