



**THE BEST WARRANTY
IN THE BUSINESS —
5 YEARS ON ALL PARTS.**



HANDLES MORE LAUNDRY AT ONCE

Designed to match double and triple loads from front-load washers or dry big, bulky items. Plus, the extra-large door opening makes loading and unloading easy.



MICROPROCESSOR COIN-DROP

Programmable controls let you adjust pricing at the touch of a button. Microprocessor coin-drop helps prevent slugging.

FOR YOUR CUSTOMERS:

- Large 30-Pound Capacity
- One Touch Selects Drying Temperature
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Door Opening

FOR YOUR OPERATION:

- Advanced Computer Controls
- Extra-Large Security Coin Vault
- Extra-Large Lint Compartment
- Easy-Access Design For Self-Service

BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor
- The Best Warranty In The Business

MAYTAG® COMMERCIAL MULTI-LOAD DRYER


MDG30PCCWW



**LARGE
CAPACITY
LETS YOU SERVE MORE
CUSTOMERS.**

LAUNDRY SOLUTIONS YOU CAN *DEPEND* ON.

Multi-Load Dryer — MICROPROCESSOR COIN-DROP

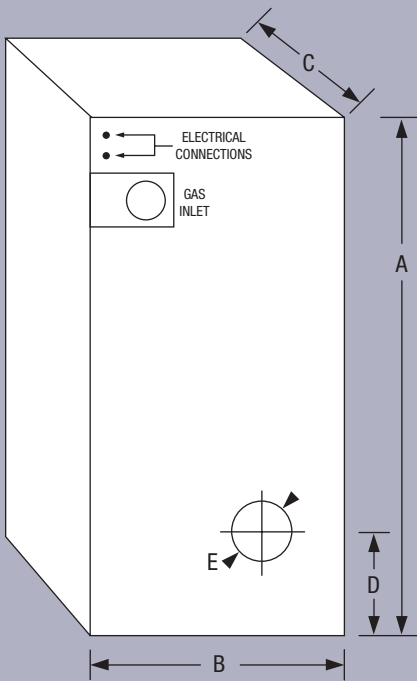

5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



Multi-Load Dryer

DRYER SPECIFICATIONS

| MODEL | MDG30PCCWW |
|---|-----------------|
| TUMBLER | |
| Capacity — lbs. (kg) | 30 (13.6) |
| Capacity — cu. ft. (cu. m) | 12.3 (.348) |
| Diameter — in. (cm) | 30 (76.2) |
| Depth — in. (cm) | 30 (76.2) |
| DRIVE MOTOR | |
| HP (kw) | 1/2 (.373) |
| AIRFLOW | |
| Cfm (cmm) | 600 (17) |
| HEAT INPUT | |
| BTU/hr. (kcal/hr.) | 90,000 (22,680) |
| GAS INLET | |
| In. (cm) | 1/2 (1.3) |
| VOLTAGE/BREAKER SIZE — amps | |
| 120V/1 PH | 20 |
| COLOR | |
| White | • |
| APPROXIMATE WEIGHT | |
| Crated — lbs. (kg) | 550 (249) |
| Uncrated — lbs. (kg) | 500 (227) |
| DIMENSIONS | |
| A) Height — in. (cm) | 72 (182.9) |
| B) Width — in. (cm) | 31 3/8 (79.8) |
| C) Depth including door handle — in. (cm) | 43 (109.2) |
| D) Floor to center of exhaust — in. (cm) | 20 1/4 (51.4) |
| E) Exhaust diameter — in. (cm) | 8 (20.3)* |
| Door opening — in. (cm) | 21 1/2 (54.6) |

*Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.

See specific instructions for proper installation.

Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



NEW YORK CITY
M.E.A.



For more information and pricing, contact:

Equipment Marketers

100 Melrose Avenue
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net