



**THE BEST WARRANTY  
IN THE BUSINESS —  
5 YEARS ON ALL PARTS.**



**THE CAPACITY YOUR  
CUSTOMERS DEMAND**

Maytag® multi-load dryers are the perfect match for large-capacity washers, handling big, bulky items. Plus, the extra-large door opening makes loading easier.



**MICROPROCESSOR COIN-DROP**

Advanced programmable controls let you adjust pricing at the touch of a button. Optional audit system matches cycles used to coins collected for additional accountability.

**FOR YOUR CUSTOMERS:**

- Large 50-Pound Capacity
- One Touch Selects Drying Temperature
- Digital Display Shows Time Remaining In Cycle

**FOR YOUR OPERATION:**

- Fits Through 36" Doorway
- Extra-Large Security Coin Vault
- Easy-Access Design For Self-Service

**BUILT-TO-LAST™ FEATURES:**

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor
- The Best Warranty In The Business

# MAYTAG® COMMERCIAL MULTI-LOAD DRYER


# MDG50PCCWW



**COMPUTER  
CONTROLS  
PROVIDE THE ULTIMATE IN  
ACCOUNTABILITY.**

LAUNDRY SOLUTIONS YOU CAN *DEPEND* ON.

## Multi-Load Dryer — MICROPROCESSOR COIN-DROP

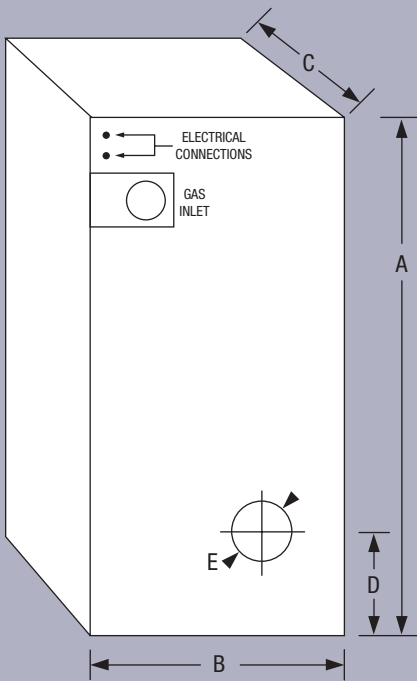

### 5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



### Multi-Load Dryer

#### DRYER SPECIFICATIONS

MODEL	MDG50PCCWW
<b>TUMBLER</b>	
Capacity — lbs. (kg)	50 (22.7)
Capacity — cu. ft. (cu. m)	18.3 (.518)
Diameter — in. (cm)	32 <sup>3</sup> / <sub>4</sub> (83.2)
Depth — in. (cm)	37 <sup>1</sup> / <sub>2</sub> (95.3)
<b>DRIVE MOTOR</b>	
HP (kw)	3/4 (.560)
<b>AIRFLOW</b>	
Cfm (cmm)	600 (17)
<b>HEAT INPUT</b>	
BTU/hr. (kcal/hr.)	150,000 (37,800)
<b>GAS INLET</b>	
In. (cm)	1/2 (1.3)
<b>VOLTAGE/BREAKER SIZE — amps</b>	
120V/1 PH	20
<b>COLORS</b>	
White	•
Bisque	•
<b>APPROXIMATE WEIGHT</b>	
Crated — lbs. (kg)	700 (317.7)
Uncrated — lbs. (kg)	651 (295.3)
<b>DIMENSIONS</b>	
A) Height — in. (cm)	72 (182.9)
B) Width — in. (cm)	34 <sup>1</sup> / <sub>4</sub> (87)
C) Depth including door handle — in. (cm)	49 <sup>5</sup> / <sub>8</sub> (126)
D) Floor to center of exhaust — in. (cm)	10 <sup>1</sup> / <sub>2</sub> (26.7)
E) Exhaust diameter — in. (cm)	8 (20.3)*
Door opening — in. (cm)	21 <sup>1</sup> / <sub>2</sub> (54.6)

\*Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.

See specific instructions for proper installation.

Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



NEW YORK CITY  
M.E.A.



For more information and pricing, contact:

## Equipment Marketers

100 Melrose Avenue  
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net