




**THE BEST WARRANTY
IN THE BUSINESS —
5 YEARS ON ALL PARTS.**

EVEN DOORWAYS DON'T STOP IT

Maytag now offers a 75-lb. capacity EZFit™ dryer that fits through a standard 36"-wide door, making installation simple. The wide basket paired with a shallow overall depth provides great tumbling action for more drying power in less floor space.



FOR YOUR CUSTOMERS:

- 75-Lb. Capacity
- Fast, Efficient Drying
- Dries Large Loads And Big, Bulky Items
- Extra-Large Door Opening
- Microprocessor Controls

FOR YOUR OPERATION:

- Fits Through A 36" Door
- Programmable Controls
- Easy-To-Change Cycle Times, Temperatures And Prices
- Easy-Clean Lint Filter

BUILT-TO-LAST™ FEATURES:

- Totally Enclosed Motor And Cabinet
- Heavy-Duty Steel Door
- The Best Warranty In The Business

MAYTAG® COMMERCIAL MULTI-LOAD DRYER

MDG76PC



*Model MDG76PCBWW
(White)*


Model MDG76PCBWS (Stainless Steel)


**75-LB. EZFit™
DRYER FITS THROUGH A 36" DOOR.**

LAUNDRY SOLUTIONS YOU CAN **DEPEND ON.**

CLP689

Multi-Load Dryer — MICROPROCESSOR COIN-DROP

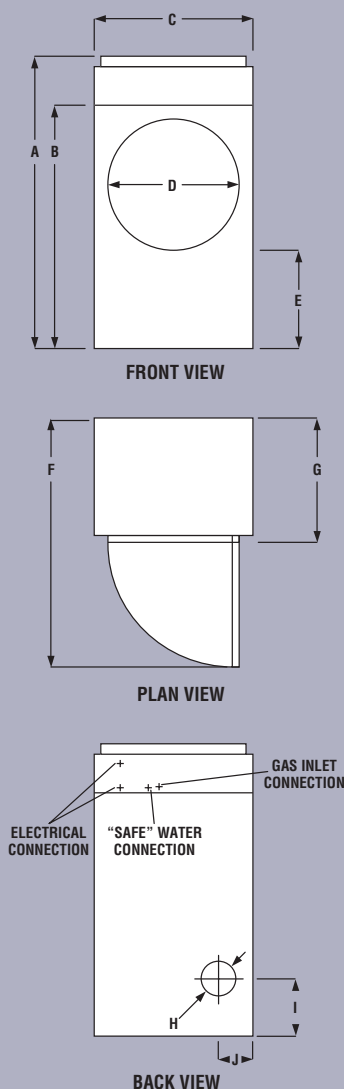

Multi-Load Dryer	
DRYER SPECIFICATIONS	
MODEL	MDG76PC
MOTOR	
Drive motor — HP (kw)	1 (.746)
Voltage/breaker size: 120 volts/1 PH — amps	20
Airflow — cfm (cmm)	1,200 (34)
Heat input — BTU/hr. (kcal/hr.)	204,000 (51,408)
Gas inlet — in. (cm)	¾ (1.9)
CAPACITY	
Tumbler capacity — lbs. (kg)	75 (34)
Tumbler capacity — cu. ft. (cu. m)	22.4 (.634)
Tumbler depth — in. (cm)	24¾ (63.2)
Tumbler diameter — in. (cm)	44½ (113)
COLORS	
White	•
Stainless Steel	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	892 (405)
Uncrated — lbs. (kg)	842 (382)
DIMENSIONS	
A) Overall height — in. (cm)	84½ (214.6)
B) Height with top removed for ease of installation — in. (cm)	70¾ (178.8)
C) Width — in. (cm)	46 (116.8)
D) Door opening — in. (cm)	31¾ (79.7)
E) Floor to bottom of door — in. (cm)	28¾ (72.1)
F) Depth with door open 90° — in. (cm)	72 (182.9)
G) Depth including handle — in. (cm)	36 (91.4)
H) Exhaust diameter — in. (cm)	10 (25.4)
I) Floor to exhaust outlet center — in. (cm)	16¾ (42.5)
J) Side to exhaust outlet center — in. (cm)	10 (25.4)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">NEW YORK CITY M.E.A.</div> <div style="text-align: center;">  C US </div> </div>	



5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



For more information and pricing, contact:

Equipment Marketers

100 Melrose Avenue
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net