

O' Lonely®



MAYTAG® COMMERCIAL SOFT-MOUNT, HIGH-SPEED EXTRACTORS

MFS50/80PN



BIG-LOAD PERFORMANCE, FLEXIBLE INSTALLATION

Maytag® soft-mount, high-speed extractors feature a suspension system that allows for wooden-floor installations.



MICROPROCESSOR CONTROLS

Maytag® microprocessor controls offer up to 20 programs with 99 steps per program to match the needs of your operation. Multilingual readouts make them easy for anyone to operate.

FOR YOUR OPERATION

- Soft-Mount Installation
- Inverter Drive Technology For Longer Life
- Up to 350 G's In Final Spin*
- Easy-To-Operate Microprocessor Controls
- Adjustable Water Temperatures And Levels
- Manual Chemical Supply System
- Ability To Use Powdered Or Liquid Chemical Supply
- 8 Supply Signals
- Two Extra-Large Drain Valves For Faster Draining
- Extra-Large Door And Handle

BUILT-TO-LAST™ FEATURES

- Heavy-Duty Latch And Door Handle
- Durable Sealed Bearings
- Rugged Frame And Cabinet
- Easy-Access Design For Convenient Self-Service

*Model MFS80PNHE only. Model MFS50PNHE spins up to 310 G's.




**SPINS UP
TO 350 G's
TO EXTRACT MORE WATER***


Model MFS80PN shown.

LAUNDRY SOLUTIONS YOU CAN *DEPEND* ON.


CLP751



FRONT VIEW

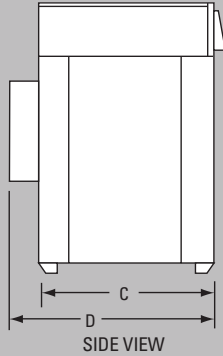

SIDE VIEW

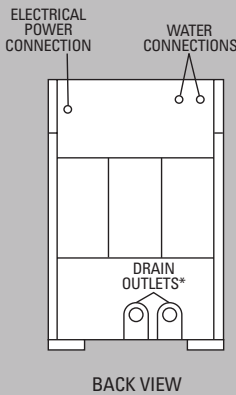

BACK VIEW

*Single Outlet: MFS50PN

Maytag® Soft-Mount, High-Speed Extractors — MICROPROCESSOR CONTROL

Soft-Mount, High-Speed Extractors		
WASHER SPECIFICATIONS		
MODEL	MFS50PN	MFS80PN
INVERTER DRIVE MOTOR — HP (kw)	3 (2.2)	5.5 (4)
VOLTAGE	208 – 240V Three-Phase	208 – 240V Three-Phase
BREAKER SIZE — amps	20	30
CAPACITY — lbs. (kg)	50 (22)	80 (36)
CYLINDER		
Volume — cu. ft. (liters)	7.8 (220.9)	11.8 (334)
Diameter — in. (cm)	29.53 (75)	35.98 (91.4)
Depth — in. (cm)	19.61 (49.8)	20.08 (51)
WASH SPEED — rpm	42	38
DISTRIBUTION SPEED — rpm	90	64
HIGH EXTRACT SPEED — rpm	800	790
HIGH G-FORCE	310	350
WATER INLET — in. (cm)	.75 (1.9)	1 (2.5)
DRAIN OUTLETS	1	2
DRAIN HOSE — in. (cm)	3 (7.62)	3 (7.62)
CABINET		
Stainless Steel	•	•
DOOR HANDLE		
Chrome	•	
Stainless Steel		•
APPROXIMATE WEIGHT		
Crated — lbs. (kg)	1,826 (830)	3,014 (1,370)
Uncrated — lbs. (kg)	1,521 (690)	2,564 (1,163)
DIMENSIONS		
A) Height — in. (cm)	64.4 (163)	75 (190)
B) Width — in. (cm)	38.8 (98)	47 (119)
C) Depth — in. (cm)	42.3 (107)	48 (122)
D) Depth — in. (cm) — includes door handle and rear vent	45 (114)	52.4 (133)
Door Opening — in. (cm)	16.14 (41.0)	21.18 (53.8)

NEW YORK CITY
M.E.A.



MAYTAG® LIMITED WARRANTY

2 YEARS — ALL PARTS
5 YEARS — SHELL,
WELDED FRAME ASSEMBLY,
BASKET, SHAFT ASSEMBLY,
BEARINGS AND SEALS

For a period from the date of original purchase through the times listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



For more information and pricing, contact:

Equipment Marketers

100 Melrose Avenue
Cherry Hill, NJ 08003

www.equipmentmarketers.net

Phone: 800.223.1376

Fax: 856.428.5477

maytag@equipmentmarketers.net