



# MAYTAG® COMMERCIAL DEPENDABLE CARE® MULTI-LOAD STACK DRYER

LAUNDRY SOLUTIONS  
YOU CAN **DEPEND** ON.

## BUILT LIKE A TANK

The MLG45PDB is one of the heaviest 45-pound stack dryers on the market, offering years of dependable Maytag performance.

## MICROPROCESSOR CONTROLS

Maytag® Computer Trac® controls let you adjust prices by cycle, day and time — and they provide simple one-touch cycle selection.



## FOR YOUR CUSTOMERS:

- Fast-Drying Axial Airflow System
- ThermoGuard™ System Helps Prevent Laundry Overheating
- Extra-Large Door Openings
- Digital Display Shows Time Remaining In Cycle

## FOR YOUR OPERATION:

- Single Coin Box For Both Dryers
- Front Access For Easy Service
- Two 8" Vents Or One Optional 10" Vent
- 2 Large-Capacity Lint Drawers


## BUILT-TO-LAST™ FEATURES:

- Heavy-Duty Enclosed Motors
- Permanently Lubricated Bearings
- Rear Belt Drive System
- The Best Warranty In The Business


# MLG45PDB



HERMOGUARD™ SYSTEM  
**PROTECTS  
LAUNDRY**  
AGAINST OVERHEATING.

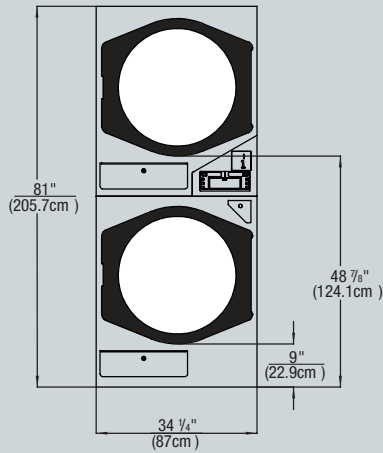

FRONT VIEW

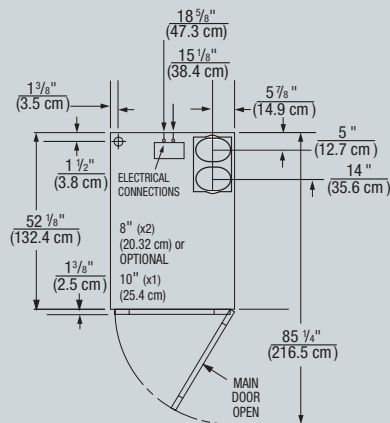

TOP VIEW

\*Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

## Maytag® Dependable Care® Multi-Load Stack Dryer

### MICROPROCESSOR COIN-DROP

	Dependable Care® Multi-Load Stack Dryer
<b>DRYER SPECIFICATIONS</b>	
<b>MODEL</b>	<b>MLG45PDB</b>
<b>MOTOR</b>	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	.75 (.56)
<b>CAPACITY</b>	
Lbs. (kg) per drying chamber	45 (20.41)
Cu. ft. (L) per drying chamber	14.6 (413.43)
<b>AIRFLOW</b>	
Cfm (cmm) per drying chamber	600 (16.99)
<b>TUMBLERS</b>	
Diameter — in. (cm)	32.75 (83.19)
Depth — in. (cm)	30 (76.2)
<b>DOOR OPENING DIAMETER</b>	
In. (cm)	27 (68.6)
<b>ELECTRICAL REQUIREMENTS</b>	
<b>BREAKER/FUSE REQUIREMENTS</b>	
Amps per drying chamber	20
<b>EXHAUST DUCT DIAMETER</b>	
In. (cm)	8 (20.3)
<b>GAS RATING</b>	
BTU/hr. (kcal/hr.) per drying chamber	112,000 (28,230)
<b>GAS INLET PER POCKET</b>	
In. (cm)	3/4 (1.9)
<b>ADJUSTABLE LEVELING LEGS</b>	
•	
<b>COLORS</b>	
White	•
Stainless Steel	•
<b>APPROXIMATE WEIGHT</b>	
Crated — lbs. (kg)	1050 (476)
Uncrated — lbs. (kg)	1015 (460)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	



NEW YORK CITY  
M.E.A.



## 5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



For more information and pricing, contact:

## Equipment Marketers

100 Melrose Avenue  
Cherry Hill, NJ 08003

Phone: 800.223.1376

Fax: 856.428.5477

www.equipmentmarketers.net

maytag@equipmentmarketers.net